


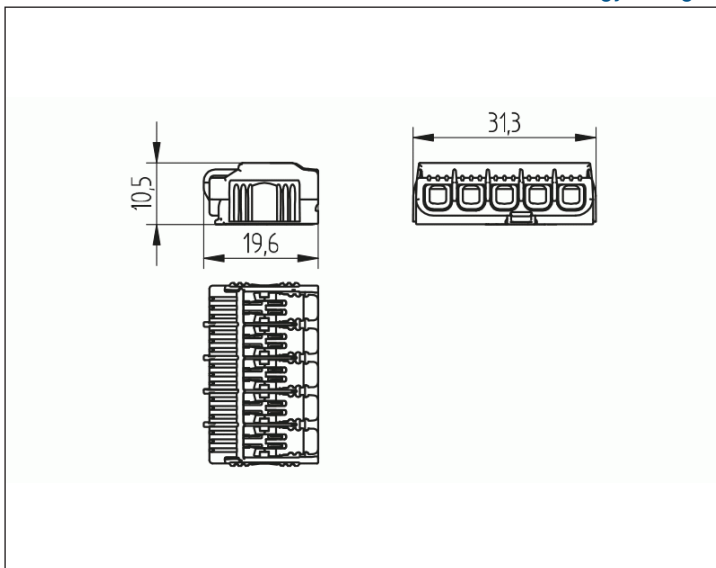

- Suitable for a wide range of lighting and building installations
- Different conductor cross-sections can be used at individual clamping points
- Direct insertion of solid conductors
- Easy, tool-free connection and disconnection of conductors via lever
- Stripping length marked on the housing
- Transparent housing allows easy visual inspection of correct conductor positioning
- Test ports accessible from the front and rear

Mechanical	
Number of clamping units	5
Number of potentials	1
Width	31.3 mm
Height	10.5 mm
Depth	19.6 mm
Material	
Material of terminal housing	PC, transparent
Lever material	PK, blue
Contact material	Copper, CrNi
Electrical – IEC	
Rated insulation voltage	450 V
Rated current	32 A
Solid conductor	0.2 ... 4 mm ²
Rigid conductor	0.2 ... 4 mm ²
Flexible conductor	0.14 ... 4 mm ²
Stripping length	11 ... 12 mm
Degree of protection (IP)	IP20
T-rating	85 °C
Electrical – UL	
Rated insulation voltage	600 V
Rated current	20 A
Conductor size	AWG 24 ... 12
Conductor types	solid, stranded
Stripping length	11 ... 12 mm
Max. operating temperature	105 °C
Commercial / Packaging	
Weight	5.5 g
Packaging quantity per box	1,500 pcs
This product contains the following REACH SVHC substances. For further information please refer to www.bjb.com.	
Substance name	2-[2H-benzotriazol-2-yl]-4-[1,1,3,3-tetramethylbutyl]phenol
CAS No.	3147-75-9
EC No.	221-573-5